

1. Feature

- ▶ High Performance
- ▶ High Reliability
- ▶ RoHS Compliant

Power Divdier

Part No: CPD06000M40000A04

Date: Nov.14th.2017

Revision No: Preliminary

2. Electrical Specifications

Parameter	Specification	Remark
Frequency Range	6000-40000MHz	
Insertion loss	$\leq 1.8\text{dB}$	
VSWR	≤ 1.80 (Input) ≤ 1.60 (Output)	
Amplitude Balance	$\leq \pm 0.4\text{dB}$	
Phase Balance	$\leq \pm 8\text{degree}$	
Isolation	$\geq 16\text{dB}$	
Forward Power	10W	
Impedance	50 Ω	

3. Mechanical Specifications

Parameter	Specifications	Remark
Dimensions	52.0x35.0x10.0mm	
Connector Type	2.92-female	
Surface Finish	Grey Painting	

4. Temperature Specifications

Parameter	Specifications	Remark
Operational Temperature	-40 to +80 °C	
Storage Temperature	-45 to +85 °C	

成都康普信源科技有限公司

Chengdu Concept Microwave Technology CO.,Ltd

No.666 ,Jinfenghuang Road , CREC Industrial Park , Jinniu District , Chengdu , China


E-mail: sales@concept-mw.com

<http://www.concept-mw.com>

Page 1 of 3



5. Outline Drawing ($\pm 0.3\text{mm}$)

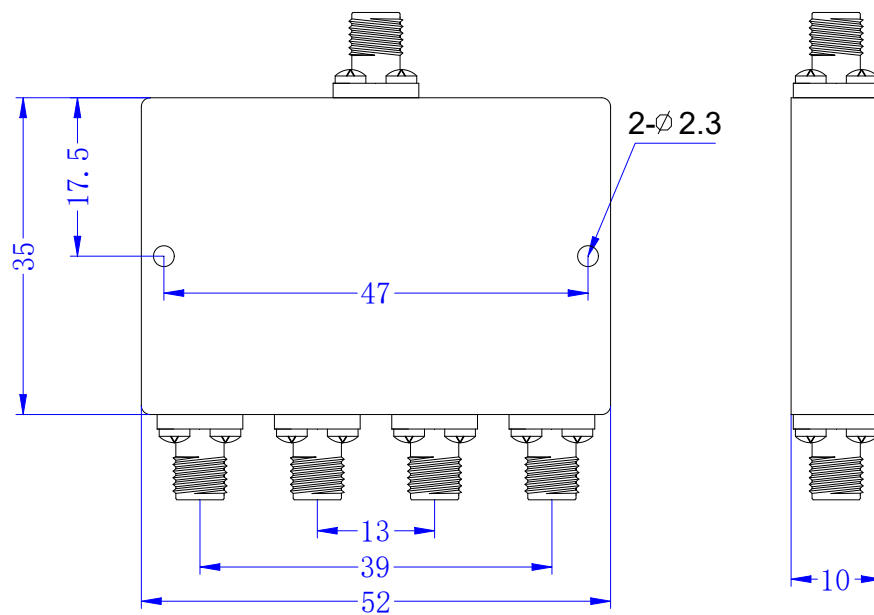


6. Test Curve



CONCEPT

VSWR , I.L , Amplitude , Phase Balance

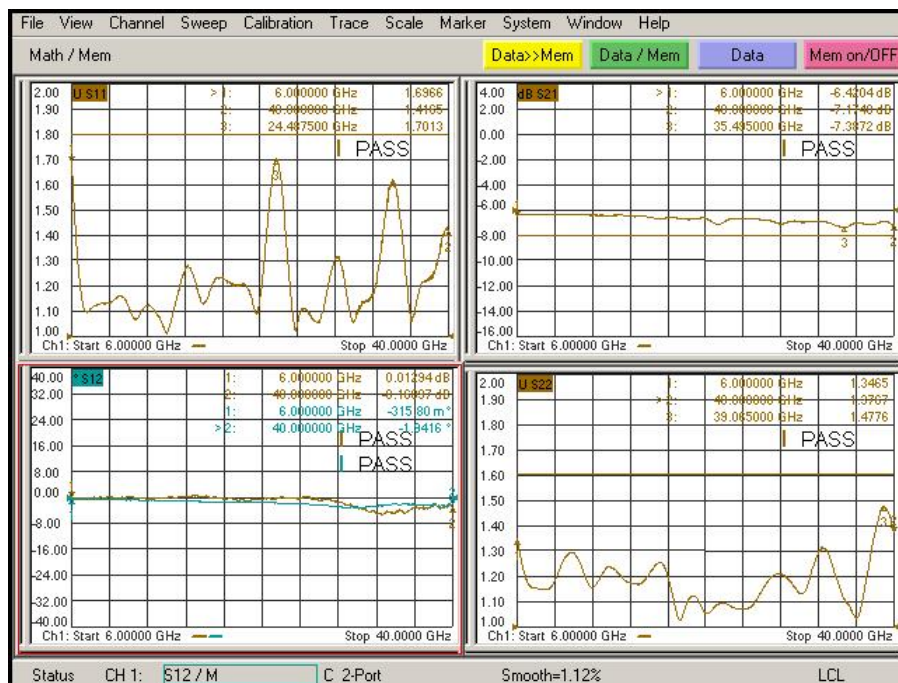

Isolation

